

LITE




**PowerPod Lite Tips and Troubleshooting
June 2018**

- 1) PowerPod Lite status light does not turn on when I click its button
 - a. Battery needs charging. Connect PowerPod Lite to USB charger. Click button; status light will flash red continuously. When the battery is fully charged the status light will turn off
 - b. After charging, if PowerPod Lite light remains unresponsive to button clicks, press-hold its button CONTINUOUSLY for about 10 seconds, *until you see the status light flash*. This “Hard Reset” reboots PowerPod Lite.
- 2) Status light is solid RED after sensor pairing (PowerPod Lite pairing instructions, Step 4)
 - a. Make sure you have an ANT+ speed sensor installed on your bike. Look for an ANT+ logo on your sensor:

 - i. Attach magnet-less ANT+ speed sensors to the front wheel hub.
 - ii. Magnet-based ANT+ speed sensors: make sure the spoke magnet passes within 1-2 coin widths of the speed sensor.
 - b. Confirm proper operation of speed sensor by spinning bike wheel; bike computer display should show speed.
 - i. If speed is shown, pair PowerPod Lite to speed sensor following step 4 of PowerPod Lite instructions.
 - ii. If bike speed is not shown in display, remove speed sensor battery, insert battery “backwards” momentarily, then reinsert normally (sensor reset). Pair sensor to bike computer, then spin bike wheel; bike computer display should show speed. If confirmed, pair PowerPod Lite to sensor (step 4).
 - c. If you still don't see bike speed, replace speed sensor battery. Pair speed sensor to bike computer, then spin bike wheel; bike computer display should show speed. If confirmed, perform PowerPod Lite Step 4 instructions again.
 - d. If you still don't see bike speed, speed sensor is defective.
- 3) I see zero watts on my bike computer screen even after riding for 3 minutes
 - a. PowerPod is asleep. Click button. **Light must become solid Green.**
 - b. If PowerPod Lite light flashes green, *then light turns off*, pair speed sensor to PowerPod Lite (press-hold PowerPod Lite button for 4 seconds, until flashing). **Whenever you do a sensor pairing, you will have to do a new O&B cal ride.**
 - c. Cadence sensor is not functioning properly. To check proper operation of cadence sensor, spin bike crank backwards for 5 seconds, and confirm that non-zero cadence (RPM) is shown on bike computer display.

- d. Confirm PowerPod light is solid green, then pair PowerPod to bike computer (instructions Step 5), making sure to follow your bike computer's pairing instructions.
- 4) I see zero watts, or low watts, or high watts *only for the first 3 minutes of my ride*, then power becomes normal
- PowerPod Lite sensor is not tightly fastened to its mount. After attaching PowerPod Lite to mount, but before tightening the mount bolt fully, gently rotate PowerPod Lite "skyward" from the rear, until its rotation is stopped by the mount. Then, tighten the mount bolt firmly, **so that PowerPod Lite cannot rotate.**
 - When reattaching PowerPod Lite, it is fixed to a position different from its prior attachment. Before tightening the mount bolt fully, gently rotate PowerPod Lite "skyward" from the rear, until its rotation is stopped by the mount. Then, tighten the mount bolt firmly, **so that the PowerPod Lite cannot rotate.**
- 5) I see zero watts on my bike computer screen after stopping for a rest break
- PowerPod Lite has gone to sleep. Click button to reawaken.
- 6) After going over a bump, my watts change abruptly to higher or lower values for the next few minutes, then return to normal.
- PowerPod Lite is not firmly attached to its mount, allowing it to rotate after hitting a bump. Gently rotate PowerPod Lite from the rear, until its rotation is stopped by the mount. Then, tighten the mount bolt *firmly*, **so that PowerPod Lite cannot rotate.**
- 7) My watts seem consistently too high or too low.
- Make sure PowerPod Lite wind port is not blocked or obstructed by bike cables

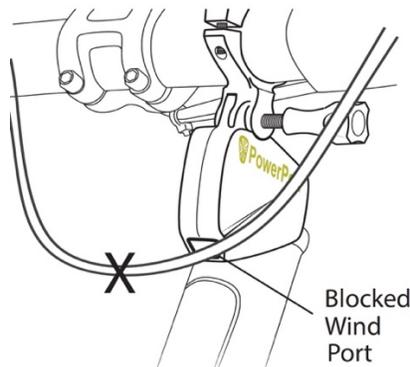

- Do a new out-and-back calibration ride. You can initiate a new O&B cal ride by doing a new sensor pairing
 - Make sure Indoor Trainer mode is OFF (see below)
- 8) When I put PowerPod Lite on another bike, it shows zero power.
- You must do a new sensor pairing and out-and-back ride each time you move PowerPod Lite to a new bike.


OPTIONAL: USING POWERPOD LITE WITH ISAAC SOFTWARE

- Install free Isaac software for Mac/PC, available here:
<https://velocomp.com/isaac-software-installation/>
- **Mac users:** *The first time you run Isaac, make sure to hold the “control” button on your keyboard, then click on the Isaac icon, then select “Open” from the menu that appears. This procedure temporarily bypasses the security features of OSX.*
- Connect PowerPod Lite to your computer using its USB cable. Click PowerPod Lite button to turn it on. When PowerPod Lite is connected to Isaac, a green box will appear around the USB icon located at the top of menu bar:



- Use the Isaac command “Device/Set Up Device...,” to fine-tune the settings of your PowerPod Lite.


- 1) Connect PowerPod Lite to your computer and launch ISAAC software
- 2) Using ISAAC Software, “Device/Set Up Device...” wizard:




- 3) Select Profile 1. **POWERPOD LITE DOES NOT WORK WITH PROFILES 2, 3, OR 4**
- 5) Type in a name you’d like to have for profile 1
- 5) Click the “Next” button and enter your bike and rider information as instructed by the “Set Up Device” windows.
- 7) IMPORTANT: Follow PowerPod Lite instructions steps 4) through 6) to pair your PowerPod Lite to your bike’s speed and (optional) cadence sensor

To use PowerPod Lite with your indoor trainer or rollers:


1. Connect PowerPod Lite to your computer, click button to turn it on, then launch Isaac software
2. Select the Isaac command “Device/Edit Trainer Settings...”



3. Select your indoor trainer OR rollers model from the list underneath the tab. In the example below, “Kinetic Cyclone” indoor trainer has been selected. Then, in the bottom of the window click the “Send to iBike” button below the speed/power graph. PowerPod Lite will “memorize” the selected indoor trainer model in its memory.

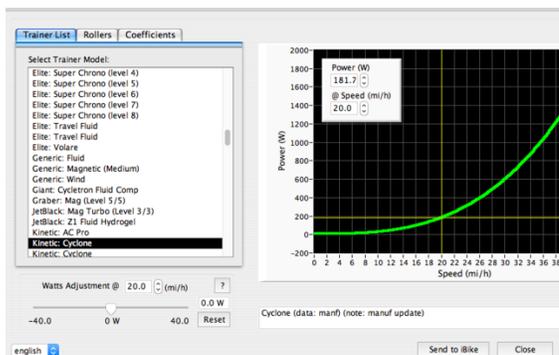


4. To turn on indoor trainer mode, use this command from Isaac, then wait for Isaac’s confirmation that trainer mode has been turned on:

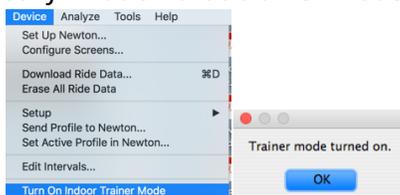

5. IMPORTANT: ONCE ENABLED, INDOOR TRAINER MODE WILL REMAIN “ON” FOR ALL SUBSEQUENT POWEROD RIDES, UNTIL YOU TURN IT OFF.

IMPORTANT: WHEN TRAINER MODE IS “ON”, POWERPOD LITE WILL NOT PROVIDE ACCURATE POWER READINGS WHEN USED FOR OUTDOOR RIDES.

6. To turn indoor trainer mode off, select this command from Isaac, then wait for Isaac’s confirmation that trainer mode has been turned off:

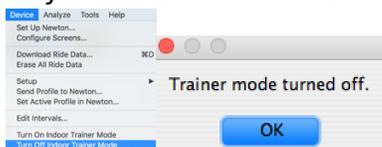

7. IMPORTANT: WHEN INDOOR TRAINER MODE IS “OFF”, POWERPOD LITE WILL NOT PROVIDE ACCURATE POWER READINGS WHEN USED FOR INDOOR RIDES.